

GIRARD-PERREGAUX



USER MANUAL

NEO-TOURBILLON WITH THREE BRIDGES
SKELETON

INSTRUCTION FOR USE

WINDING

The self-winding system keeps your Tourbillon fully wound if you wear it at least 14 hours a day. If your watch has not been worn for some time, rewind it manually.

Crown in two positions:

- 0. Manual-winding position (crown not pulled out).
- 1. Time setting position (crown fully pulled out).

Manual-winding:


To wind, turn the crown backward and forward when it is in position 0). When fully wound, your watch has a power reserve of approximately 60 hours.

Warning: do not force the crown once the resistance increases as this could damage the movement.

SETTING THE TIME

- 1. Pull your crown out to the time setting position 1).
- 2. Turn your crown clockwise to position the hour and minute hands at the selected time. At the time signal, push the crown back to position 0). Your watch will restart immediately.

Warning: after making any setting, always return the crown to its original position, to preserve the water resistance of your watch and prevent any damage to the mechanism. To do so, press the crown against the case in position 0).

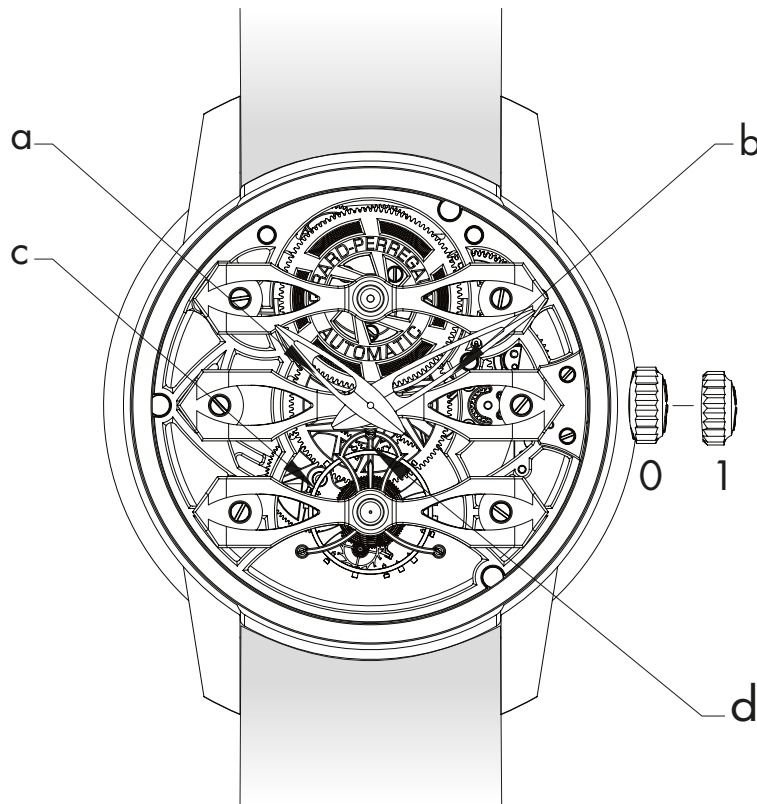

FUNCTIONS

- a | Hours
- b | Minutes
- c | Tourbillon
- d | Small seconds on the tourbillon

GIRARD-PERREGAUX GP09400 SELF-WINDING MECHANICAL MOVEMENT

Diameter:	36.00 mm (1.6")
Height:	9.54 mm
Frequency:	21,600 Vib/h - (3 Hz)
Jewels:	27
Power reserve:	minimum 60 hours
Functions:	tourbillon, hours, minutes, small seconds on the tourbillon

CASE

Diameter:	45.00 mm
Crystal:	sapphire anti-reflective 'box'
Case-back:	sapphire crystal 'box'
Water resistance:	30 meters (3 ATM)

