

GIRARD-PERREGAUX



USER MANUAL

TOURBILLON WITH THREE GOLD BRIDGES, 45 MM

INSTRUCTIONS FOR USE

WINDING


The self-winding system keeps your Tourbillon fully wound if you wear it at least 14 hours a day. If your Tourbillon has not been worn for some time, rewind it manually. Turn the crown backwards and forwards when it is in position 0).

Warning: do not force the crown when resistance increases. When fully wound, the watch has a power reserve of approximately 60 hours.

SETTING THE TIME

1. Pull out the crown to position 1).
2. Turn the crown until the hour and minute hands are set 5 minutes before the exact time.
3. To set the seconds hand, first let the tourbillon cage turn until it reaches the 60-seconds mark, then hold it there by turning the crown very slightly in a counterclockwise direction. At the time signal, move the minute hand forward until it has reached the exact time; then push the crown back into position 0). Your watch will then be synchronized and start immediately.

Warning: After making any setting, always return the crown to its original position, to preserve the water resistance of your watch and prevent any damage to the mechanism. To do so, press the crown against the case in the position 0).

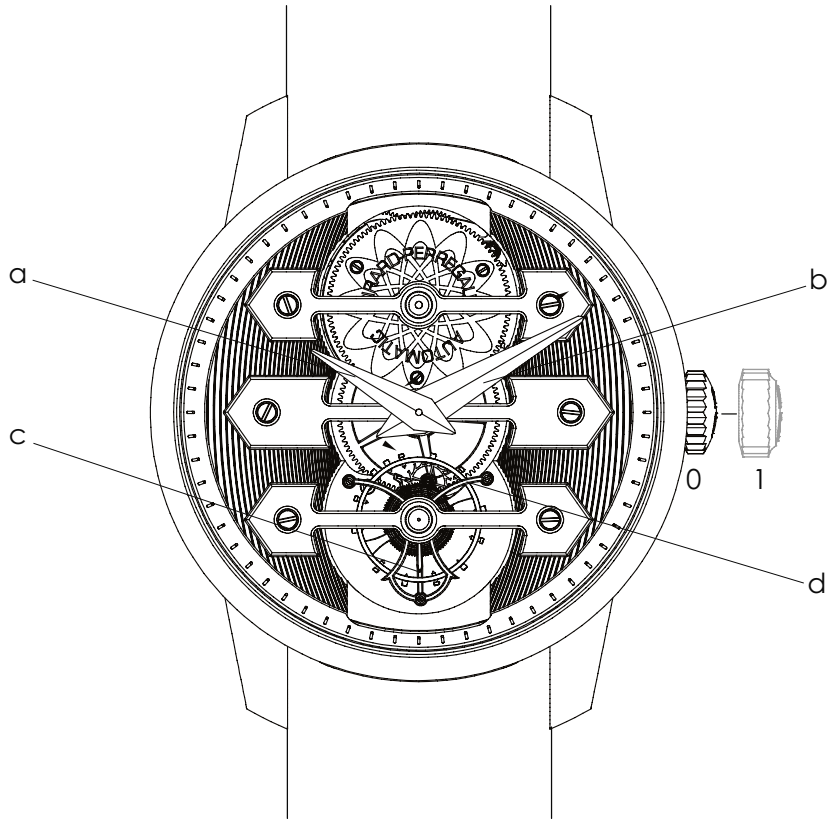

FUNCTIONS

- a | Hours
- b | Minutes
- c | Small Second on the tourbillon
- d | Tourbillon

GIRARD-PERREGAUX GP09400 SELF-WINDING MECHANICAL MOVEMENT

Diameter:	45.00 mm
Frequency:	21,600 Vib/h - (3 Hz)
Jewels:	27
Power reserve:	minimum 60 hours
Functions:	tourbillon, hours, minutes, small seconds on the tourbillon

CASE

Diameter:	45.00 mm
Crystal:	sapphire anti-reflective 'box'
Case-back:	sapphire crystal 'box'
Water resistance:	30 meters (3 ATM)

MDE-0054